#### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization International Bureau



### 

### (43) International Publication Date - 16 June 2005 (16.06.2005)

PCT

## (10) International Publication Number WO 2005/055543 A1

- (51) International Patent Classification7: 25/02
- F104L 27/26,
  - - - · ·
- (21) International Application Number:

PCT/AU2004/001704

- (22) International Filing Date: 3 December 2004 (03.12.2004)
- (25) Filing Language:

English

(26) Publication Language:


English

- (30) Priority Data: 2003906690
- 3 December 2003 (03.12.2003) AU
- (71) Applicant (for all designated States except US): AUSTRALIAN TELECOMMUNICATIONS COOPERATIVE RESEARCH CENTRE [AU/AU]; Curtin University of Technology, Building 314, Room 127, Wark Avenne, Bentley, W.A. 6012 (AU).

- (72) Inventors; and
- (75) Inventors/Applicants (for US only): FAULKNER, Michael [AU/AU]; 7 Athol Street, Moonee Ponds, VIC 3039 (AU). TOLOCHKO, Igor [AU/AU]; 21/28-32 Stordee Parade, Dee Why, NSW 2099 (AU).
- (74) Agent: FREEHILLS PATENT & TRADE MARK ATTORNEYS; Level 43, 101 Little Collins Street, Melbourne, VIC 3000 (AU).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AB, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FL, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Construed on next page]

#### (54) Title: CHANNEL ESTIMATION FOR OFDM SYSTEMS

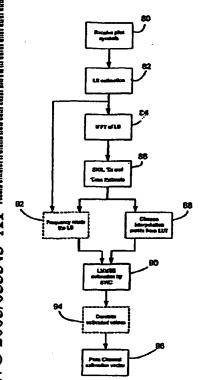

(57) Abstract: A method for performing channel estimation in an orthogonal frequency-division multiplexing system, the method including the steps of: receiving (80) transmitting pilot symbols from a plurality of transmit antennas; forming (82) a least-squares estimation matrix from the transmitted pilot symbols; forming (84-88) a sparse smoothing matrix approximating a fixed weighting matrix, wherein each row vector in the sparse smoothing matrix contains one or more of the strongest weights in each row of the fixed weighting matrix; and (90) deriving a channel estimation matrix from the sparse smoothing matrix and the least-squares estimation matrix.